


<b>Brand name</b>	<b>Tenax™</b>
<b>Product type</b>	<b>DRNF</b> Dry Reinforcement Non-Crimp Fabric
<b>Product key</b>	<b>710224</b>
<b>Product designation</b>	<b>DRNF IM UD 0300 710224</b>
<b>Construction</b>	<b>V/0°</b>

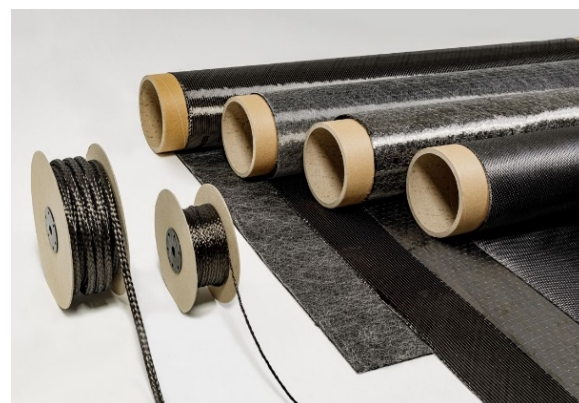

**Detail construction**

Layer		Fiber	Areal weight [g/m <sup>2</sup> ]
<i>Stitch</i>	<i>Tricot</i>		
2	0°	Tenax™-E IMS65 E23 24K 830tex	300
1	Veil	E-Glass	14
<i>Stitch</i>	<i>Loop-side</i>		

+ 4 g for stitching yarn

**Product features**

Carbon fiber areal weight incl. sizing	300 g/m <sup>2</sup>
Total areal weight	318 g/m <sup>2</sup>
Fabric width	1270 mm or 2540 mm
Stitching length	2.8 mm
Paper core dimension	1400/2800 mm x 152.4 mm x 10 mm
Typical roll length	0 m - 150 m

**Process parameter**

- If powder binder is part of the product:  
The preform recommendation is to apply vacuum on preform package and hold for 20 min. at 120 °C.

- All data shown are typical values representative of the material and cannot be guaranteed. Properties may vary depending on samples preparation and test methods.
- For each shipment an inspection certificate is generated and supplied.
- A detailed customer specification is arranged on request.
- The export or transfer of carbon fiber products can be subject to authorization, depending on end-use and final destination.